



**EMBUILT
TECHNOLOGIES**

PTSK-2

PT Test Set Kit - 2





FEATURES

-  **Standard PT Parameters: Volt, %S, Tdf, %Ratio Error**
-  **Unknown PT Parameters: Volt, %X, Tpr, %Ratio Error**
-  **Software Interfacing Facility by USB cable**
-  **Compared Parameters:**
Ratio Error, R/E Over Range, Over Voltage
Phase Difference, P/E Over Range, Rev. Polarity



COMPREHENSIVE TESTING OF ELECTRICAL APPLIANCES




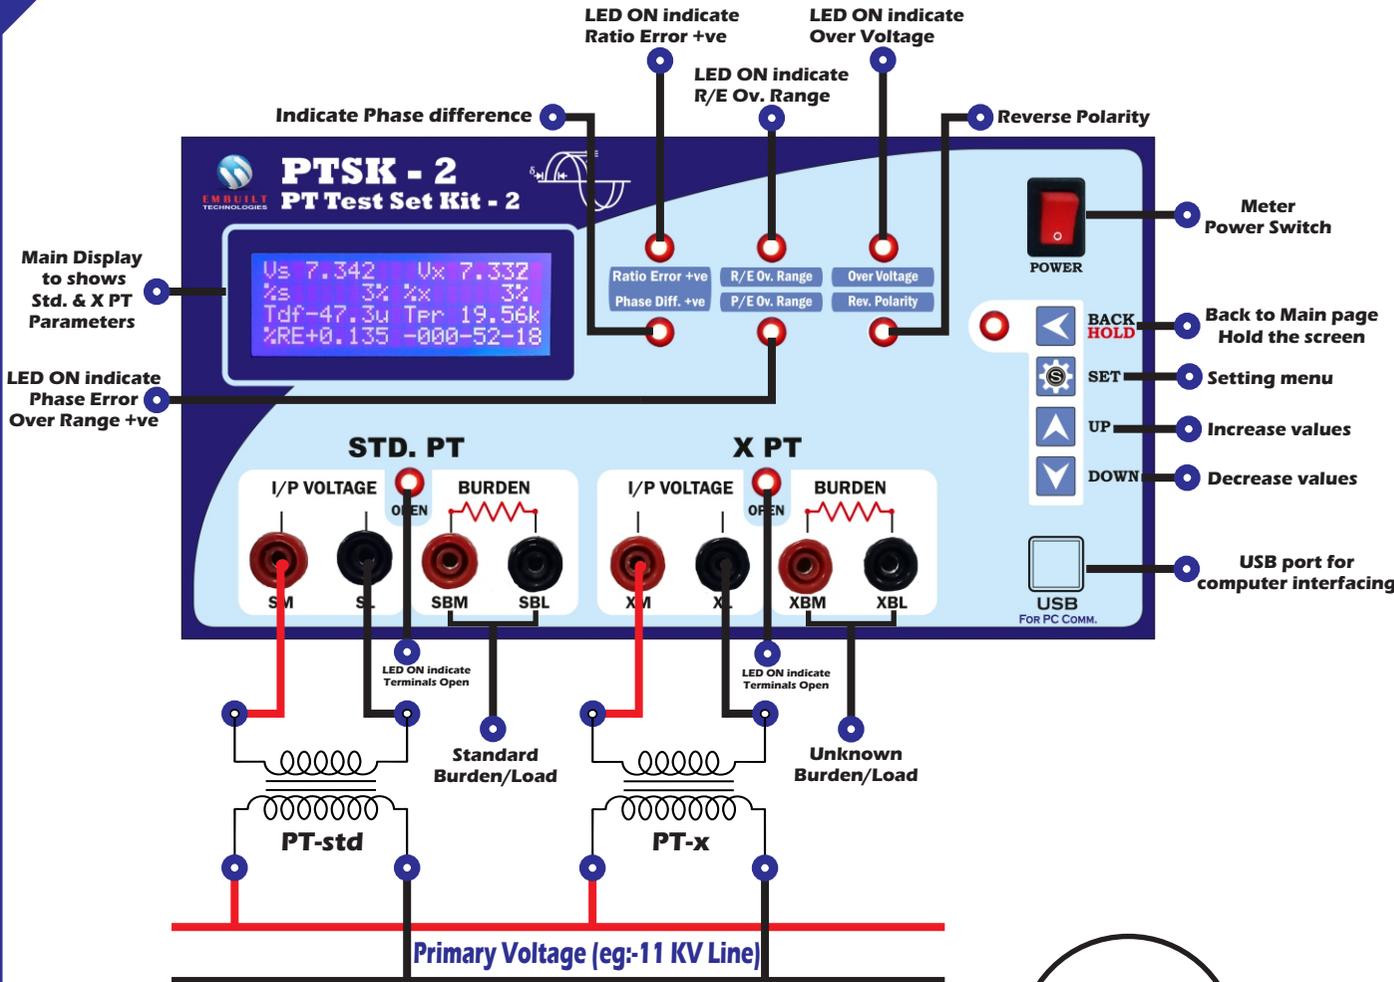

TECHNICAL SPECIFICATION


Auxiliary Power	180 - 250 V, 50 Hz
STD. AC Input Voltage	5.0 - 300 V, 45 - 55 Hz
X AC Input Voltage	5.0 - 300 V, 45 - 55 Hz
Standard Burden	0 (open terminal) to 500VA Max
Unknown Burden	0 (open terminal) to 500VA Max
Voltage Accuracy	Class 0.1 for 5V to 50V Class 0.2 for 50V to 300V
Resolution for Phase measurement	1" second

ORDERING CODE

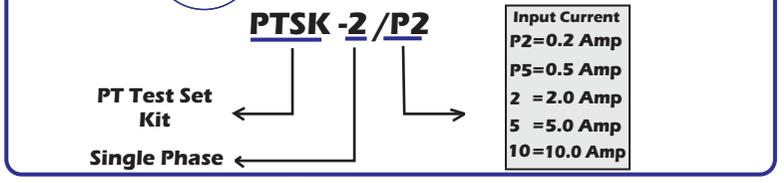


SOFTWARE

Features:
Interface with PC



DIMENSION

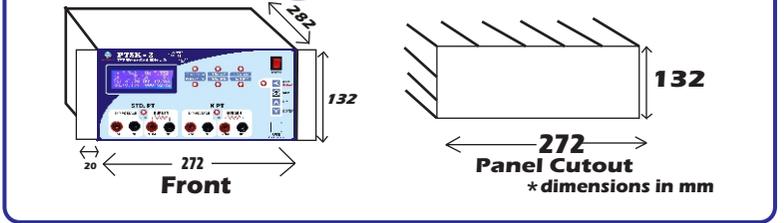

Developed & Manufactured By :

EMBUILT TECHNOLOGIES
A-404, Vaishali Nagar,
Jaipur-302021, Rajasthan, INDIA
Mob. : +91-7524853539
E-mail info@embuilt.com
Website : <http://www.embuilt.com>



ACCESSORIES

USB cable **Power cable** **Manual** **Software CD** **Patch Cords**

Ref: 2022-06-09