




**EMBUILT
TECHNOLOGIES**

UTM-2A

UPS Testing Meter

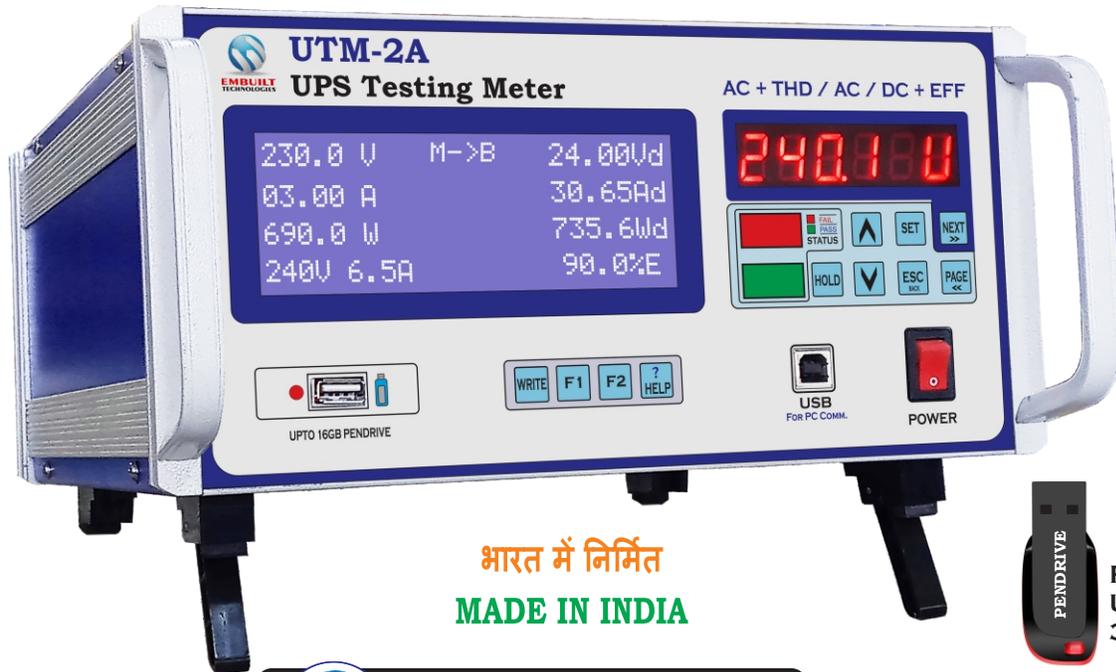

भारत में निर्मित
MADE IN INDIA



PENDRIVE
UPTO
32GB

FEATURES

- Testing Of AC + THD, AC & DC
- Production Testing With Data Logging
- Ideal For Inverter Power Testing
UPS AC Out, Mains AC & Battery(DC)
- On-Board Memory to Store Data
up-to 32000 Tests
- Testing Mode: Mains to Battery &
Battery to Inverter
- Pass/Fail Facility For Saved 25 Models
Data Log On Connect In Pen-drive
- AC Parameters: Mains V, A, W, PF, F
UPS Out V, A, W, PF, F, V-THD & A-THD
- Software Interfacing Facility & Data
Sharing to Computer
- DC Parameters: V, A, W & Efficiency
- Big LCD Display For Clear View



COMPREHENSIVE TESTING OF ELECTRICAL MACHINES & WINDINGS




**UPS / POWER
ELECTRONICS**

● LCD Display To Show All AC And DC Parameters With THD And Efficiency

● Tab For PASS/FAIL Status

● Large LED Display for Important Parameters:

- Voltage U
- Current A
- Power P
- PF PF
- VTHD Ut
- ATHD At
- DC POWER dP
- EFFICIENCY EFF
- SERIAL NO. S, No

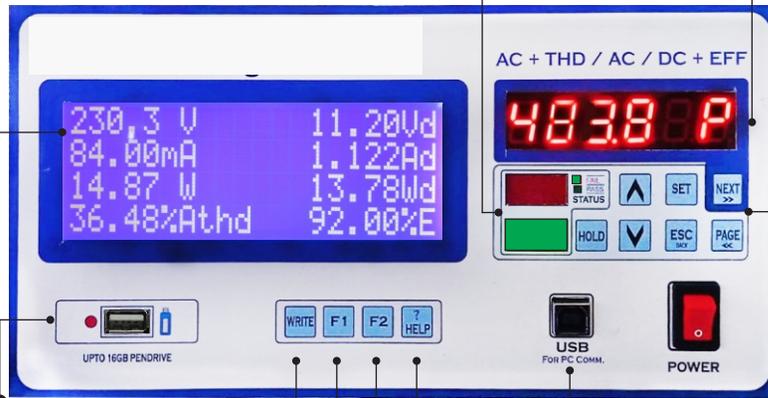

Pen Drive upto 16GB For Data logging and Log On Connect

Manually Data Save


Date/Time Data Help Back-up

Optically isolated USB for software interfacing


Setting Menu



LOG DATA ON PENDRIVE

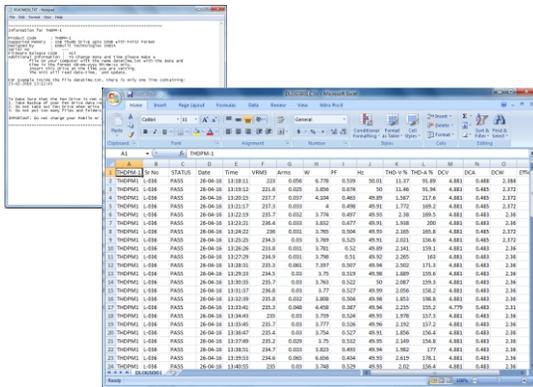

SOFTWARE

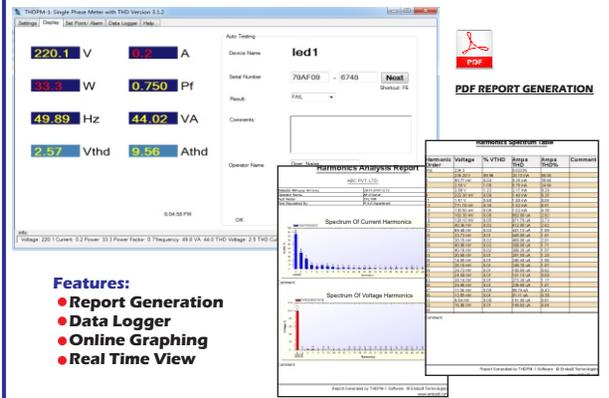

- Features:
- Report Generation
 - Data Logger
 - Online Graphing
 - Real Time View




TECHNICAL SPECIFICATION

Auxiliary Power	220 - 240V AC, 50 Hz
AC Mains Voltage	500V max
AC Mains Current	60Amps max
AC UPS Voltage	500V max
AC UPS Current	60Amps max
DC Voltage	400V max
DC Current	Shunt
Accuracy	Class 0.1
Efficiency	Mains to Battery Battery to Inverter
Polarity Indication	(+) For Discharging (-) For Charging



DIMENSION

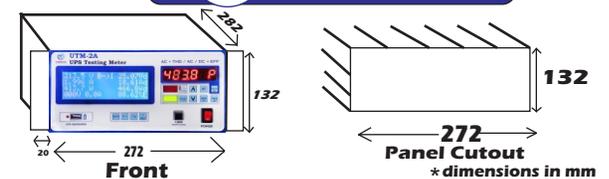

Developed & Manufactured By :

EMBUILT TECHNOLOGIES

A-404, Vaishali Nagar,
Jaipur-302021, Rajasthan, INDIA
Mob.: +91 7524853539

E-mail info@embuilt.com

Website : www.embuilt.com

www.leddrivertesting.com



EMBUILT TECHNOLOGIES



ACCESSORIES

